

POWER REQ: 120VAC, 0.5 AMPS

FIXTURE MUST BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT OR INJURY MAY HAPPEN.


MOUNTING HOLES ARE PROVIDED ON THE CHASSIS (SEE PG 2).



SALES AID-2019-12-13

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUMI DESIGN INC. ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION OF LUMI DESIGN INC. IS PROHIBITED. © 2020 LUMI DESIGN

APPROVED BY:	DATE:	*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT			
REVISION REQUESTED		THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.			

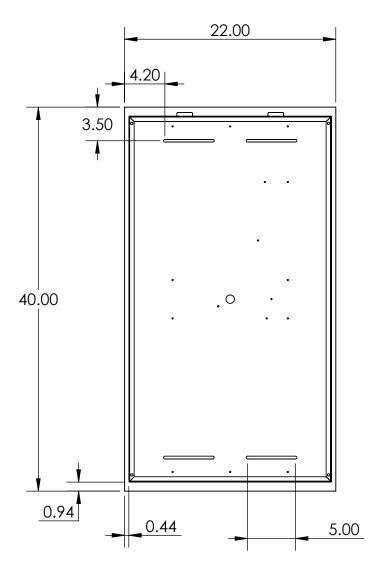

MOUNTING HOLE LOCATIONS



SALES AID-2019-12-13

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUMI DESIGN INC. ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION OF LUMI DESIGN INC. IS PROHIBITED. © 2020 LUMI DESIGN

PG.2 OF 3

APPROVED BY: DATE:										
REVISION REQUESTED										
	LED TEMPERATURE (KELVIN)		700K	3000К	4100k		CUSTOM			
	LINE VOLTAGE DIMMING		REQUIRED		NOT REQUIRED					
	0-10 V DIMMING		REQUIRED		NOT REQUIRED					
	STANDARD SPECIFICATIONS									
		AVG RATED LIFE (hrs): 80000								
	LED SPECIFICATIONS		TOTAL LU	3600	LUMENS: 600/FT					
			CRI: 89-91							
		LED CHIPSET: EPISTAR								
		24V DC								
	POWER SPECIFICATION	NOMINAL LENGTH (FT): 6'								
		NOMINAL WATTAGE: 5 WATTS/FT								



SALES AID-2019-12-13

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUMI DESIGN INC. ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION OF LUMI DESIGN INC. IS PROHIBITED. © 2020 LUMI DESIGN