

**POWER REQ: 120 VAC - 0.5 AMPS** 

ENTRY-

5. ELECTRICAL POWER SHOULD BE CONTROLLED BY A LIGHT SWITCH.

FIXTURE MUST BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT OR INJURY MAY HAPPEN.

MOUNTING HOLES ARE PROVIDED ON THE CHASSIS (SEE PG 2).



SALES AID-2019-12-13

CAROL-24.00X36.00-LED


DIMS IN INCHES

REV. A

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUMI DESIGN INC. ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION OF LUMI DESIGN INC. IS PROHIBITED. © 2020 LUMI DESIGN

APPROVED BY: DATE:

REVISION REQUESTED

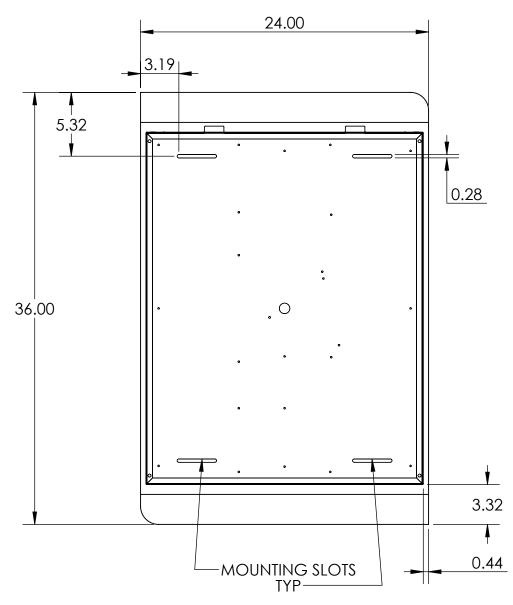

## **MOUNTING HOLE LOCATIONS**



ì	SALES AID-2019-12-13 CAROL-24.00X36.00-LED	DIMS IN INCHES	REV. A
•	PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUMI DESIGN INC. ANY REPRODUCTION IN PART OR AS A	SCALE: 1:8	PG.2 OF 3
	WHOLE WITHOUT THE WRITTEN PERMISSION OF LUMI DESIGN INC. IS PROHIBITED. © 2020 LUMI DESIGN		

APPROVED BY: DATE: REVISION REQUESTED						
	LED SPECIFICATION CHECKLIST					
LED TEMPERATURE (KELVIN)	2700K	3000K	4100K	CUSTOM		
LINE VOLTAGE DIMMING	REQUIRED		NOT REQUIRED			
0-10 V DIMMING	REQUIRED	REQUIRED		NOT REQUIRED		
STANDARD SPECIFICATIONS						
		AVG RATED LIFE (hrs): 80000				
LED SDECIEIC ATIONIS	TOTAL LU	TOTAL LUMENS @ SOURCE: 2		D LUMENS: 600/FT		
LED SPECIFICATIONS		CRI: 89-91				
		LED CHIPSET: EPISTAR				
		24V DC				
POWER SPECIFICATION	NOMINAL LENGTH (FT): 4'					
		NOMINAL WATTAGE: 5 WATTS/FT				



SALES AID-2019-12-13

CAROL-24.00X36.00-LED

DIMS IN INCHES

REV.

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUMI DESIGN INC. ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION OF LUMI DESIGN INC. IS PROHIBITED, © 2020 LUMI DESIGN