APPROVED BY: DATE: REVISION REQUESTED POLISHED CLEAR MIRROR— **POWDER COATED** PREMIUM MATTE WHITE 36.00 18.00 1.72 18.25 2.50 FROSTED AREA **TYP** 36.00 **ELECTRICAL SAFETY** LR1293 **SPECIFICATIONS:** 1. THE MC CABLE IS BROUGHT IN THROUGH THE CHASSIS KNOCKOUT. 2. INSERT GROUND WIRE IN GROUNDED CONNECTOR. **POWER** 2. INSERT HOT AND NEUTRAL WIRE INTO LUMINAIRE DISCONNECT.


4. NO ELECTRICAL BOX REQUIRED.

5. ELECTRICAL POWER SHOULD BE CONTROLLED BY A LIGHT SWITCH. **FNTRY** FRONT VIEW FIXTURE MUST BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT OR INJURY MAY HAPPEN. **POWER REQ: 120 VAC 0.5 AMPS** MOUNTING HOLES ARE PROVIDED ON THE CHASSIS (SEE PG 2). KELLY-36.00X36.00 SALES AID-2019-12-13 DIMS IN INCHES REV. A

LUMIDESIGN

APPROVED BY:	DATE:	*BY APPROVING THESE DIM
REVISION REQUESTED		

BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

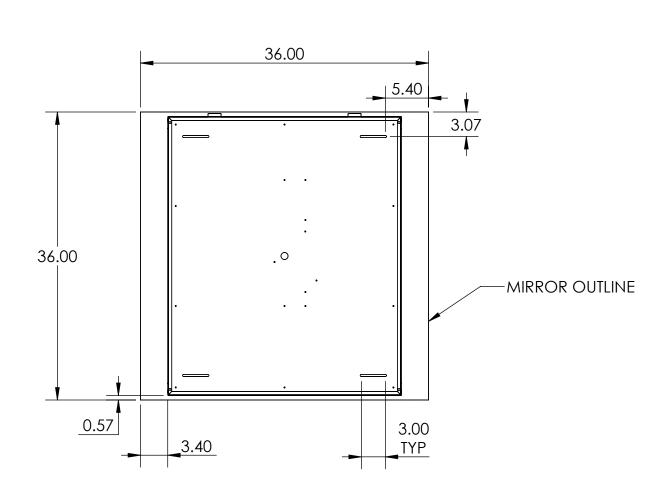

MOUNTING HOLE LOCATIONS



APPROVED BY: DATE: REVISION REQUESTED					
LED SPECIFICATION CHECKLIST					
LED TEMPERATURE (KELVIN)	2700K	3000K	4100K	CUSTOM	
LINE VOLTAGE DIMMING	REQUIRED	REQUIRED		NOT REQUIRED	
0-10 V DIMMING	REQUIRED		NOT REQUIRED		
STANDARD SPECIFICATIONS					
		AVG RATED LIFE (hrs): 80000			
	TOTAL LI	TOTAL LUMENS @ SOURCE: 3600		0 LUMENS: 600/FT	
LED SPECIFICATIONS		CRI: 89-91			
		LED CHIPSET: EPISTAR			
		24V DC			
POWER SPECIFICATION		NOMINAL LENGTH (FT): 6'			
		NOMINAL WATTAGE: 5 WATTS/FT			

